



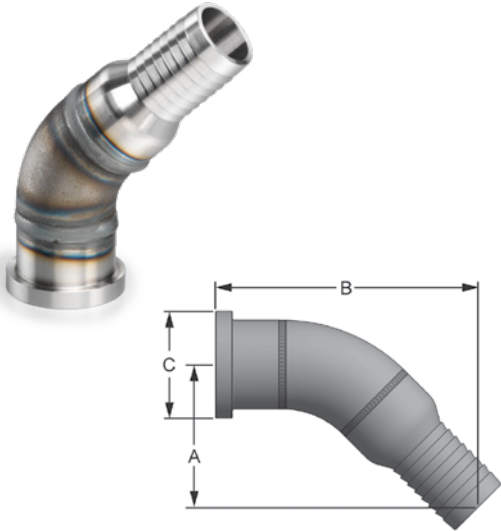

- Suction to 400 psi max
- Carbon steel natural finish
- Material certificates available upon request
- Flange head manufactured to SAE J518-1

45° HOSE BARB TO SAE FLANGE HEAD								
	HOSE BARB SIZE	FLANGE SIZE	A	B	C	HB ID	FH ID	SPLIT FLANGE†
20HB-20SF45	1.25	1.25	2.66	4.91	2.00	1.03	1.28	20SFO
24HB-20SF45	1.50	1.25	2.66	4.91	2.00	1.28	1.28	20SFO
20HB-24SF45	1.25	1.50	2.74	5.11	2.38	1.03	1.50	24SFO
24HB-24SF45	1.50	1.50	2.74	5.11	2.38	1.28	1.50	24SFO
32HB-24SF45	2.00	1.50	2.74	5.11	2.38	1.75	1.50	24SFO
40HB-24SF45	2.50	1.50	2.74	5.11	2.38	2.17	1.50	24SFO
24HB-32SF45	1.50	2.00	3.23	5.86	2.81	1.28	1.94	32SFO
32HB-32SF45	2.00	2.00	3.23	5.86	2.81	1.75	1.94	32SFO
40HB-32SF45	2.50	2.00	3.23	5.86	2.81	2.17	1.94	32SFO
48HB-32SF45	3.00	2.00	3.23	5.86	2.81	2.72	1.94	32SFO
24HB-40SF45	1.50	2.50	3.89	7.39	3.31	1.28	2.33	40SFO
32HB-40SF45	2.00	2.50	3.89	7.39	3.31	1.75	2.33	40SFO
40HB-40SF45	2.50	2.50	3.89	7.39	3.31	2.17	2.33	40SFO
48HB-40SF45	3.00	2.50	3.89	7.39	3.31	2.72	2.33	40SFO
64HB-40SF45	4.00	2.50	4.33	7.83	3.31	3.69	2.33	40SFO
32HB-48SF45	2.00	3.00	4.42	8.30	4.00	1.75	3.00	48SFO
40HB-48SF45	2.50	3.00	4.42	8.30	4.00	2.17	3.00	48SFO
48HB-48SF45	3.00	3.00	4.42	8.30	4.00	2.72	3.00	48SFO
64HB-48SF45	4.00	3.00	4.42	8.30	4.00	3.69	3.00	48SFO
64HB-56SF45	4.00	3.50	5.13	10.88	4.50	3.69	3.38	56SFO
40HB-64SF45	2.50	4.00	5.13	9.38	5.00	2.17	3.83	64SFO
48HB-64SF45	3.00	4.00	5.13	9.38	5.00	2.72	3.83	64SFO
64HB-64SF45	4.00	4.00	5.13	9.38	5.00	3.69	3.83	64SFO

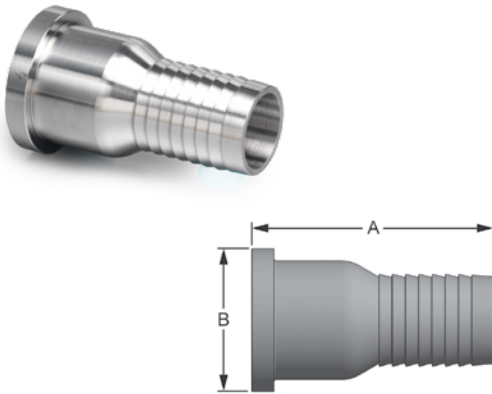

STRAIGHT HOSE BARB TO SAE FLANGE HEAD							
	HOSE BARB SIZE	FLANGE SIZE	A	B	HB ID	FH ID	SPLIT FLANGE ¹
20HB-20SF	1.25	1.25	3.39	2.00	1.03	1.03	20SFO
24HB-20SF	1.50	1.25	3.39	2.00	1.25	1.25	20SFO
20HB-24SF	1.25	1.50	3.39	2.38	1.03	1.50	24SFO
24HB-24SF	1.50	1.50	3.50	2.38	1.28	1.28	24SFO
32HB-24SF	2.00	1.50	3.93	2.38	1.50	1.50	24SFO
40HB-24SF	2.50	1.50	4.63	2.38	2.17	1.50	24SFO
24HB-32SF	1.50	2.00	3.93	2.81	1.28	2.00	32SFO
32HB-32SF	2.00	2.00	3.93	2.81	1.75	1.75	32SFO
40HB-32SF	2.50	2.00	4.63	2.81	2.00	2.00	32SFO
48HB-32SF	3.00	2.00	5.19	2.81	2.72	1.75	32SFO
24HB-40SF	1.50	2.50	4.63	3.31	1.28	2.50	40SFO
32HB-40SF	2.00	2.50	3.93	3.31	1.75	2.50	40SFO
40HB-40SF	2.50	2.50	4.63	3.31	2.17	2.17	40SFO
48HB-40SF	3.00	2.50	5.19	3.31	2.50	2.50	40SFO
64HB-40SF	4.00	2.50	6.50	3.31	3.69	2.38	40SFO
32HB-48SF	2.00	3.00	4.75	4.00	1.75	3.00	48SFO
40HB-48SF	2.50	3.00	4.63	4.00	2.17	3.00	48SFO
48HB-48SF	3.00	3.00	5.19	4.00	2.72	2.72	48SFO
64HB-48SF	4.00	3.00	5.83	4.00	3.69	3.00	48SFO
64HB-56SF	4.00	3.50	5.83	4.50	3.50	3.50	56SFO
40HB-64SF	2.50	4.00	5.83	5.00	2.17	3.69	64SFO
48HB-64SF	3.00	4.00	5.83	5.00	2.72	3.69	64SFO
64HB-64SF	4.00	4.00	5.83	5.00	3.69	3.69	64SFO

† Optional Split Flange sold separately