


Hose Barb to SAE Thread

- Suction to 400 PSI max
- Buna seals standard / Viton optional
- Carbon steel natural finish
- 90° & 45° SAE thread with adjustable nut
- Material certificates available upon request
- SAE threads manufactured to J1926

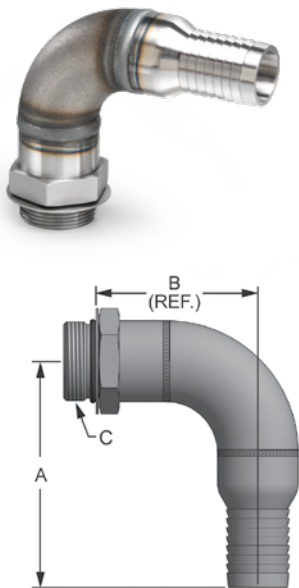

90° HOSE BARB TO SAE THREAD								
	HOSE BARB SIZE	THREAD SIZE	A	B (REF.)	C	HB ID	SAE ID	BALL VALVE†
20HB-20SAE90	1.25	1.25	4.64	3.28	1 5/8-12	1.03	1.08	LV2BS#20-2T-MH
24HB-20SAE90	1.50	1.25	4.64	3.28	1 5/8-12	1.28	1.08	LV2BS#20-2T-MH
*20HB-24SAE90	1.25	1.50	5.00	3.65	1 7/8-12	1.03	1.32	LV2BS#24-2T-MH
*24HB-24SAE90	1.50	1.50	5.00	3.65	1 7/8-12	1.28	1.32	LV2BS#24-2T-MH
*32HB-24SAE90	2.00	1.50	5.00	3.65	1 7/8-12	1.75	1.32	LV2BS#24-2T-MH
*40HB-24SAE90	2.50	1.50	5.00	3.65	1 7/8-12	2.17	1.32	LV2BS#24-2T-MH
*24HB-32SAE90	1.50	2.00	6.19	4.40	2 1/2-12	1.28	1.58	LV2BS#32-2T-MH
*32HB-32SAE90	2.00	2.00	6.19	4.40	2 1/2-12	1.75	1.58	LV2BS#32-2T-MH
*40HB-32SAE90	2.50	2.00	6.19	4.40	2 1/2-12	2.17	1.58	LV2BS#32-2T-MH
*48HB-32SAE90	3.00	2.00	6.19	4.40	2 1/2-12	2.72	1.58	LV2BS#32-2T-MH
*24HB-40SAE90	1.50	2.50	7.50	5.23	3-12	1.28	2.09	LV2BS#40-2T-MH
*32HB-40SAE90	2.00	2.50	7.50	5.23	3-12	1.75	2.09	LV2BS#40-2T-MH
40HB-40SAE90	2.50	2.50	7.50	5.23	3-12	2.17	2.09	LV2BS#40-2T-MH
*48HB-40SAE90	3.00	2.50	7.50	5.23	3-12	2.72	2.09	LV2BS#40-2T-MH
*64HB-40SAE90	4.00	2.50	8.13	5.23	3-12	3.69	2.09	LV2BS#40-2T-MH
*32HB-48SAE90	2.00	3.00	8.75	6.15	3 1/2-12	1.75	2.48	LV2BS#48-2T-MH
*40HB-48SAE90	2.50	3.00	8.75	6.15	3 1/2-12	2.17	2.48	LV2BS#48-2T-MH
*48HB-48SAE90	3.00	3.00	8.75	6.15	3 1/2-12	2.72	2.48	LV2BS#48-2T-MH
*64HB-48SAE90	4.00	3.00	8.75	6.15	3 1/2-12	3.69	2.48	LV2BS#48-2T-MH
*40HB-64SAE90	2.50	4.00	10.75	7.65	4 1/2-12	2.17	3.94	LV2BS#64-2T-MH
*48HB-64SAE90	3.00	4.00	10.75	7.65	4 1/2-12	2.72	3.94	LV2BS#64-2T-MH
*64HB-64SAE90	4.00	4.00	10.75	7.65	4 1/2-12	3.69	3.94	LV2BS#64-2T-MH

* Uses Adjustable Spanner

† Optional Ball Valve sold separately