


SUCTION & RETURN



Hose Barb to SAE Flange Head	72
SAE Thread to Tank Coupling	74
SAE Thread to Flange Head	75
Hose Barb to SAE Thread	76
Suction and Return Line Valves	78

Hose Barb to SAE Flange Head

- Suction to 400 psi max
- Carbon steel natural finish
- Material certificates available upon request
- Flange head manufactured to SAE J518-1

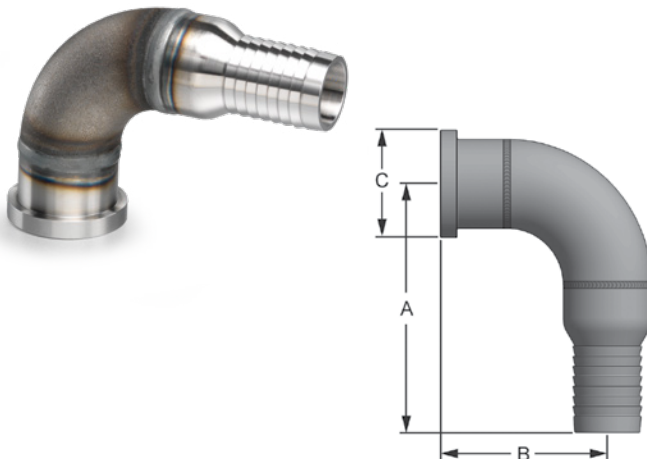

90° HOSE BARB TO SAE FLANGE HEAD								
	HOSE BARB SIZE	FLANGE SIZE	A	B	C	HB ID	FH ID	SPLIT FLANGE†
20HB-20SF90	1.25	1.25	4.64	3.14	2.00	1.03	1.28	20SFO
24HB-20SF90	1.50	1.25	4.64	3.14	2.00	1.28	1.28	20SFO
20HB-24SF90	1.25	1.50	5.00	3.50	2.38	1.03	1.50	24SFO
24HB-24SF90	1.50	1.50	5.00	3.50	2.38	1.28	1.50	24SFO
32HB-24SF90	2.00	1.50	5.00	3.50	2.38	1.75	1.50	24SFO
40HB-24SF90	2.50	1.50	5.00	3.50	2.38	2.17	1.50	24SFO
24HB-32SF90	1.50	2.00	6.19	4.25	2.81	1.28	1.94	32SFO
32HB-32SF90	2.00	2.00	6.19	4.25	2.81	1.75	1.94	32SFO
40HB-32SF90	2.50	2.00	6.19	4.25	2.81	2.17	1.94	32SFO
48HB-32SF90	3.00	2.00	6.19	4.25	2.81	2.72	1.94	32SFO
24HB-40SF90	1.50	2.50	7.50	5.50	3.31	1.28	2.33	40SFO
32HB-40SF90	2.00	2.50	7.50	5.50	3.31	1.75	2.33	40SFO
40HB-40SF90	2.50	2.50	7.50	5.50	3.31	2.17	2.33	40SFO
48HB-40SF90	3.00	2.50	7.50	5.50	3.31	2.72	2.33	40SFO
64HB-40SF90	4.00	2.50	8.13	5.50	3.31	3.69	2.33	40SFO
32HB-48SF90	2.00	3.00	8.75	6.38	4.00	1.75	3.00	48SFO
40HB-48SF90	2.50	3.00	8.75	6.38	4.00	2.17	3.00	48SFO
48HB-48SF90	3.00	3.00	8.75	6.38	4.00	2.72	3.00	48SFO
64HB-48SF90	4.00	3.00	8.75	6.38	4.00	3.69	3.00	48SFO
64HB-56SF90	4.00	3.50	10.75	9.25	4.50	3.69	3.38	56SFO
40HB-64SF90	2.50	4.00	10.75	7.75	5.00	2.17	3.83	64SFO
48HB-64SF90	3.00	4.00	10.75	7.75	5.00	2.72	3.83	64SFO
64HB-64SF90	4.00	4.00	10.75	7.75	5.00	3.69	3.83	64SFO

† Optional Split Flange sold separately

