



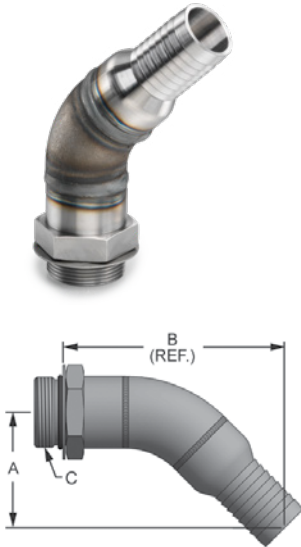

45° HOSE BARB TO SAE THREAD								
	HOSE BARB SIZE	THREAD SIZE	A	B (REF.)	C	HB ID	SAE ID	BALL VALVE†
20HB-20SAE45	1.25	1.25	2.66	5.06	1 5/8-12	1.03	1.08	LV2BS#20-2T-MH
24HB-20SAE45	1.50	1.25	2.66	5.06	1 5/8-12	1.28	1.08	LV2BS#20-2T-MH
*20HB-24SAE45	1.25	1.50	2.74	5.26	1 7/8-12	1.04	1.32	LV2BS#24-2T-MH
*24HB-24SAE45	1.50	1.50	2.74	5.26	1 7/8-12	1.28	1.32	LV2BS#24-2T-MH
*32HB-24SAE45	2.00	1.50	2.74	5.26	1 7/8-12	1.75	1.32	LV2BS#24-2T-MH
*40HB-24SAE45	2.50	1.50	2.74	5.26	1 7/8-12	2.17	1.32	LV2BS#24-2T-MH
*24HB-32SAE45	1.50	2.00	3.23	6.01	2 1/2-12	1.28	1.58	LV2BS#32-2T-MH
*32HB-32SAE45	2.00	2.00	3.23	6.01	2 1/2-12	1.75	1.58	LV2BS#32-2T-MH
*40HB-32SAE45	2.50	2.00	3.23	6.01	2 1/2-12	2.17	1.58	LV2BS#32-2T-MH
*48HB-32SAE45	3.00	2.00	3.23	6.01	2 1/2-12	2.72	1.58	LV2BS#32-2T-MH
*24HB-40SAE45	1.50	2.50	3.89	7.12	3-12	1.28	2.09	LV2BS#40-2T-MH
32HB-40SAE45	2.00	2.50	3.89	7.12	3-12	1.75	2.09	LV2BS#40-2T-MH
*40HB-40SAE45	2.50	2.50	3.89	7.12	3-12	2.17	2.09	LV2BS#40-2T-MH
*48HB-40SAE45	3.00	2.50	3.89	7.12	3-12	2.72	2.09	LV2BS#40-2T-MH
*64HB-40SAE45	4.00	2.50	4.33	7.56	3-12	3.69	2.09	LV2BS#40-2T-MH
*32HB-48SAE45	2.00	3.00	4.42	8.07	3 1/2-12	1.75	2.48	LV2BS#48-2T-MH
*40HB-48SAE45	2.50	3.00	4.42	8.07	3 1/2-12	2.17	2.48	LV2BS#48-2T-MH
*48HB-48SAE45	3.00	3.00	4.42	8.07	3 1/2-12	2.72	2.48	LV2BS#48-2T-MH
*64HB-48SAE45	4.00	3.00	4.42	8.07	3 1/2-12	3.69	2.48	LV2BS#48-2T-MH
*40HB-64SAE45	2.50	4.00	5.13	9.28	4 1/2-12	2.17	3.94	LV2BS#64-2T-MH
*48HB-64SAE45	3.00	4.00	5.13	9.28	4 1/2-12	2.72	3.94	LV2BS#64-2T-MH
*64HB-64SAE45	4.00	4.00	5.13	9.28	4 1/2-12	3.69	3.94	LV2BS#64-2T-MH

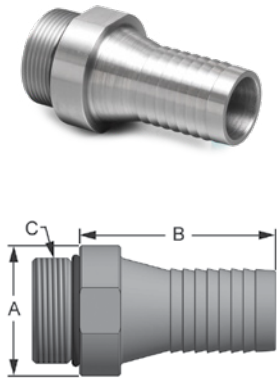

STRAIGHT HOSE BARB TO SAE THREAD								
	HOSE BARB SIZE	THREAD SIZE	A	B	C	HB ID	SAE ID	BALL VALVE†
20HB-20SAE	1.25	1.25	2.00	3.01	1 5/8-12	1.03	1.08	LV2BS#20-2T-MH
24HB-20SAE	1.50	1.25	2.00	3.01	1 5/8-12	1.28	1.08	LV2BS#20-2T-MH
20HB-24SAE	1.25	1.50	2.50	3.01	1 7/8-12	1.03	1.14	LV2BS#24-2T-MH
24HB-24SAE	1.50	1.50	2.50	3.01	1 7/8-12	1.28	1.32	LV2BS#24-2T-MH
32HB-24SAE	2.00	1.50	2.50	3.45	1 7/8-12	1.75	1.32	LV2BS#24-2T-MH
40HB-24SAE	2.50	1.50	2.50	3.97	1 7/8-12	2.17	1.32	LV2BS#24-2T-MH
24HB-32SAE	1.50	2.00	3.25	3.01	2 1/2-12	1.28	1.58	LV2BS#32-2T-MH
32HB-32SAE	2.00	2.00	3.25	3.45	2 1/2-12	1.58	1.58	LV2BS#32-2T-MH
40HB-32SAE	2.50	2.00	3.25	3.97	2 1/2-12	2.17	1.58	LV2BS#32-2T-MH
48HB-32SAE	3.00	2.00	3.25	4.59	2 1/2-12	2.72	1.58	LV2BS#32-2T-MH
24HB-40SAE	1.50	2.50	3.75	3.05	3-12	1.28	2.56	LV2BS#40-2T-MH
32HB-40SAE	2.00	2.50	3.75	3.49	3-12	1.75	2.56	LV2BS#40-2T-MH
40HB-40SAE	2.50	2.50	3.75	4.01	3-12	2.09	2.09	LV2BS#40-2T-MH
48HB-40SAE	3.00	2.50	3.75	4.63	3-12	2.72	2.56	LV2BS#40-2T-MH
64HB-40SAE	4.00	2.50	3.75	5.13	3-12	3.69	2.56	LV2BS#40-2T-MH
32HB-48SAE	2.00	3.00	4.50	3.49	3 1/2-12	1.75	2.95	LV2BS#48-2T-MH
40HB-48SAE	2.50	3.00	4.50	4.01	3 1/2-12	2.17	2.95	LV2BS#48-2T-MH
48HB-48SAE	3.00	3.00	4.50	4.63	3 1/2-12	2.48	2.48	LV2BS#48-2T-MH
64HB-48SAE	4.00	3.00	4.50	5.13	3 1/2-12	3.69	2.95	LV2BS#48-2T-MH
40HB-64SAE	2.50	4.00	5.50	4.01	4 1/2-12	2.17	3.94	LV2BS#64-2T-MH
48HB-64SAE	3.00	4.00	5.50	4.63	4 1/2-12	2.72	3.94	LV2BS#64-2T-MH
64HB-64SAE	4.00	4.00	5.50	5.13	4 1/2-12	3.69	3.94	LV2BS#64-2T-MH

* Uses Adjustable Spanner

† Optional Ball Valve sold separately